

BEAST[®]

BY LACKMOND[®]



TILE PRODUCTS AND SOLUTIONS

EQUIPMENT | ACCESSORIES | DIAMOND TOOLS

LACKMOND[®]

VIP 2125

Manual tile cutter



Radial tile cutter ideal for straight and 45° angle cuts on single and double fired ceramic, porcelain stoneware.

- Equipped with:
- Sliding cutting head and plunging engine
 - Collapsible legs
 - Pump for water recycling type S0
 - Equipped with US PLUG



Position 45° angle cuts



Plunging cutting head

| TECHNICAL DATA | | | | | | | |
|------------------------------|-------------------------------------|---------------------|------------------------------|------------------|-----------------|------------------|--------------------|
| VIP 2125 (Art. USA857/B)* | Ø10 in - Ø1 in Ø250mm - Ø25,4 mm | 49.21 in 1250 mm | 34.65x34.65 in 880x880 mm | 2.56 in 65 mm | 3.07in 78 mm | 1.97 in 50 mm | 116.84 Lb 53 Kg |

ACCESSORIES



SIDE TABLE
Part# VIPSIDETABLE
* Side table sold separately.



B-LOCK
Part# 90262
Micrometric adjustable tile locking System

- Adjustable length Adjustable height and pressure (max 40 mm.)
- Anti-scratch blocking foot with adjustable orientation
- Can be fixed to the working tables (main or side) of PRIME, SUPREME, DYNAMIC 1200
- Ergonomic handle with "Safe Opening" device

LEGGERA

Manual tile cutter



► "TO PUSH" cut

Manual tile cutters "TO PUSH" for diagonal and straight cuts on single-double fired ceramic and porcelain stoneware tiles.

| TECHNICAL DATA | | | | | |
|---------------------------------|---------------------------------|------------------------------|------------------------------|-----------------------------|--------------------------|
| Leggera 137 | 53.94 in 1370 mm | 37.99x37.99 in 965x965 mm | 0.20 - 0.59 in 5 - 15 mm | Ø19/32 " Ø15x6x1,5 mm | 26.90 Lb 12,2 kg |
| | Leggera 92 | 36.22 in 920 mm | 25.59x25.59 in 650x650 mm | 0.16 - 0.59 in 4 - 15 mm | Ø19/32 " Ø15x6x1,5 mm |
| Leggera 78 - Speical Order Only | | 30.71 in 780 mm | 21.65x21.65 in 550x550 mm | 0.16 - 0.59 in 4 - 15 mm | Ø19/32 " Ø15x6x1,5 mm |
| | Leggera 67 - Speical Order Only | 26.38 in 670 mm | 18.5x18.5 in 470x470 mm | 0.16 - 0.59 in 4 - 15 mm | Ø19/32 " Ø15x6x1,5 mm |
| Leggera 49 | | 19.29 in 490 mm | 13.58x13.58 in 345x345 mm | 0.16 - 0.59 in 4 - 15 mm | Ø19/32 " Ø15x6x1,5 mm |



SOFT CASE

A professional soft case to better protect your tile cutter. Strong, resistant and easy to carry.



Available for models:

LEGGERA Profievò



65" Soft Case



65" Soft case



48" Soft Case






48" Soft case


| | | | |
|---------|----------|---------|----------|
| 1 Piece | 5 Pieces | 1 Piece | 5 Pieces |
|---------|----------|---------|----------|

ProfiEVO

Manual tile cutter

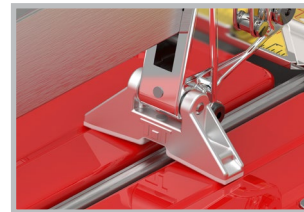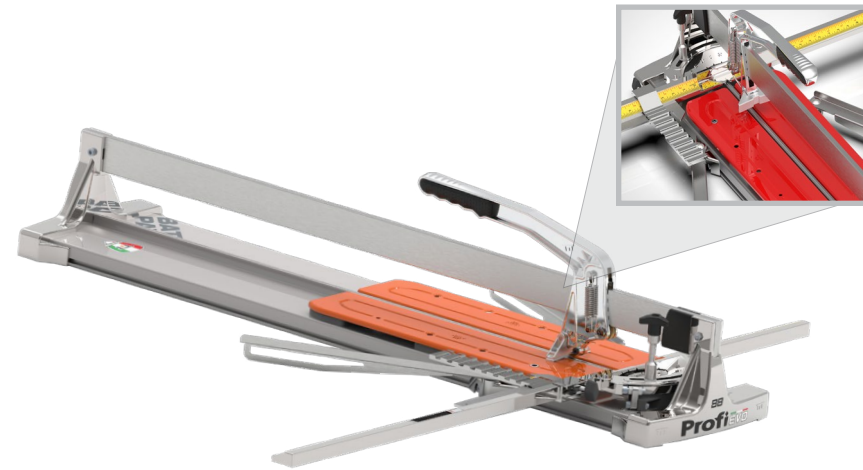

Aluminium draw-plate to get the maximum of rigidity and lightness at the same time.

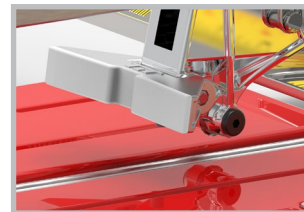

Goniometric square in "90°" position for a direct reading of the measurement for straight cuts (Black lower scale).

▶ "TO PUSH" cut

Manual tile cutters "TO PUSH" for diagonal and straight cuts on single-double fired ceramic and porcelain stoneware tiles.

| TECHNICAL DATA | | | | | |
|----------------|----------|----------------|---------------|--------------|----------|
| Profi EVO 163 | 64.17 in | 45.28x45.28 in | 0.2 - 0.59 in | Ø19/32 " | 42.86 Lb |
| | 1630 mm | 1150x1150 mm | 5 - 15 mm | Ø15x6x1,5 mm | 19,4 kg |
| Profi EVO 133 | 52.36 in | 37.01x37.01 in | 0.2 - 0.59 in | Ø19/32 " | 36.55 Lb |
| | 1330 mm | 940x940 mm | 5 - 15 mm | Ø15x6x1,5 mm | 16,5 kg |
| Profi EVO 103 | 40.55 in | 28.35x28.35 in | 0.2 - 0.59 in | Ø19/32 " | 29.98 Lb |
| | 1030 mm | 720x720 mm | 5 - 15 mm | Ø15x6x1,5 mm | 13,6 kg |
| Profi EVO 88 | 34.65 in | 24.41x24.41 in | 0.2 - 0.59 in | Ø19/32 " | 27.56 Lb |
| | 880 mm | 620x620 mm | 5 - 15 mm | Ø15x6x1,5 mm | 12,5 kg |
| Profi EVO 63 | 24.8 in | 17.32x17.32 in | 0.2 - 0.59 in | Ø19/32 " | 19.93 Lb |
| | 630 mm | 440x440 mm | 5 - 15 mm | Ø15x6x1,5 mm | 9,0 kg |
| Profi EVO 45 | 17.72 in | 12.6x12.6 in | 0.2 - 0.59 in | Ø19/32 " | 17.02 Lb |
| | 450 mm | 320x320 mm | 5 - 15 mm | Ø15x6x1,5 mm | 7,7 kg |

100%
ALUMINIUM



Spare Wheel Kit

EXTRA SUPERLUNGA

Oversized tile bridge saw



The EXTRA 3300 S Superlunga is ideal for straight and 45° angle cuts on oversize porcelain tiles. The top guide rail is made from extruded aluminum at high resistance to remain straight and accurate over the extended length. The motor carriage slides with 8 ball-bearings equipped with interchangeable stainless-steel tracks for extreme accuracy and easy maintenance. The motor is adjustable for cutting depth and can be locked in place. It uses an 8" blade. Additionally, the handwheel allows control of the motor with ease from the end of the saw. Laser guide and wheels are included.

Equipped with:

- Single-phase 230V~50Hz 1,4Kw
- Thermal protection switch with release coil
- Adjustable legs
- Adjustable goniometer fence
- Comes with 4 extension side benches
- Comes with 3 B-Lock tile clamps

| TECHNICAL DATA | | | | | |
|------------------|-----------|----------------|----------------|---------------|-----------|
| SuperLunga 3300S | 129.92 in | 91.73x91.73 in | 1.38 - 1.77 in | 7.87/1 " | 395.73 Lb |
| | 3300 mm | 2330x2330 mm | 35-45 mm | Ø200xØ25,4 mm | 179,5 kg |

ACCESSORIES




EXTENSION SIDE TABLE WITH ROLLERS

(Optional Accessory)



EXTENSION SIDE BENCH

(4 Included with Saw)



B-LOCK TILE CLAMP 40MM MAX

(3 Included with Saw)



WHEELS FOR BATTIPAV SAWS

(1 Included with Saw)



WATER PUMP Type S1

(1 Included with Saw)

CLASSplus


Tile and marble bridge saws



**115V/60HZ.
1,8HP / 1,4KW
12A / 3400rpm**



Plunging cutting head



The carriage engine group with sliding carriage equipped with 8 ball-bearings



| TECHNICAL DATA | | | | | | | | |
|---------------------------------------|------------------|---------------------|---------------------|------------------------------|------------------------------|------------------|------------------|----------------------|
| Class Plus 1300S | 10 in Ø250 mm | 45.67 in 1160 mm | 51.18 in 1300 mm | 32.28x32.28 in 820x820 mm | 36.22 in 920x920 mm | 2.56 in 65 mm | 2.09 in 53 mm | 128.97 Lb 58,5 kg |
| Class Plus 850S (Part. 9999575524) | 10 in Ø250 mm | 27.95 in 710 mm | 33.46 in 850 mm | 19.69x19.69 in 500x500 mm | 23.62x23.62 in 600x600 mm | 2.56 in 65 mm | 2.09 in 53 mm | 106.92 Lb 48,5 kg |

Radial tile cutter ideal for straight and 45° angle cuts on hard ceramic, porcelain stoneware, marble and thin granite slab.

Equipped with:

- Sliding cutting head and plunging engine
- Thermal protection
- Pump for water recycling type S0



10" Ceramic Blade included.

ADDITIONAL 10" BLADES

- BP10 - Hard Porcelain
- BPM10 - Mesh
- BPT10 - Turbo
- BG10 - Glass



ACCESSORIES



TILE LOCK SYSTEM

- Excellent solution to hold the tiles tight specially in 45° cuts



EXTENSION SIDE BENCH

Mixer

Universal mixer



**1,6 Hp
1,2 Kw**

Universal mixer for tile adhesives, cement, paint, and epoxy resins. The material is poured directly on the black plastic cap and centrifuged for mixing providing a homogeneous paste without lumps. The mixer comes standard with a handle and wheels for easy transportation. It is equipped with:

- Single-phase motor 230V~50Hz 1,6 Hp / 1,2 Kw
- An automatic safety switch prevents the motor to start when the mixing head is raised
- 17 Gallon Bucket
- Mixing Paddle
- 110-pound capacity



SAFETY:
An automatic safety switch prevents the motor to start when the mixing head is completely raised up.



The material must be poured on



The machine is easy to move.

| TECHNICAL DATA | | | | |
|----------------|---|----------------------|-------------------|----------|
| Mixer 50 Super | 1,6 Hp / 1,2 Kw, 12A 115V 60Hz 1700rpm | 60 min ⁻¹ | 17.17 gal | 49.38 Lb |
| | 1,6 Hp / 1,2 Kw, 12A 115V 60Hz 1700rpm | 60 min ⁻¹ | 65 Lt | 22,4 Kg |
| Extra Bucket | X | X | 17.17 gal / 65 Lt | X |

BEAST TILE / STONE DRILLING SYSTEM

MOTOR SIZE: 7 amp
TOOL WEIGHT: 5.2 lb
WARRANTY: 1 Year



| ITEM | MOTOR SIZE | WEIGHT | WARRANTY |
|--------|------------|---------|----------|
| FB750W | 7 amp | 5.2 lbs | 1 year |

- Kit includes drilling machine, bit template, and water tank
- Durable plastic case protects tool for transport
- 3,000 - 10,000 rpm variable speed motor
- Exclusively fits BEAST series thin wall tile bits (tile bits sold separately, see page 7 for details)



WATER INJECTION HEAD / ADAPTOR


- ADAPTS 29MM CYLINDRICAL BORE TO 1/2" SHAFT
- ALLOWS USE ON ALL POPULAR HAND-HELD ROTARY DRILLS
- PROVIDES STEADY FLOW OF WATER TO KEEP BITS COOL

| ITEM | DESCRIPTION |
|------------|-------------------------------------|
| BPBADAPTOR | 29mm Cylindrical Bore to 1/2" Shaft |

BEAST PRO SERIES THIN WALL TILE / STONE CORE BITS

The BEAST PRO Series Thin Wall Tile and Stone Core Bits provide extremely clean, accurate and chip free cutting in a variety of materials. These bits work in conjunction with the BEAST drilling system to provide extremely accurate and chip free performance in the hardest of applications. An adaptor / water delivery system is available to allow use of these bits with a standard 1/2" drill.

- CONFIGURATION:** CONTINUOUS RIM, THIN WALL
WELD TYPE: FAST SINTERING
APPLICATION: PORCELAIN TILE
 CERAMIC TILE
 GRANITE
 MARBLE
- VERY CLEAN, ACCURATE DRILLING
 - VERY LONG LIFE; CHIP FREE CUTS
 - INTENDED FOR USE WITH BEAST DRILLING SYSTEM



| ITEM | DIAMETER | ARBOR | SEG/RIM HEIGHT |
|---------|----------|--------------------------------------|----------------|
| BPB16 | 1/6" | 5/8" - 11 Threaded; 29mm Cylindrical | 10mm |
| BPB15 | 1/5" | 5/8" - 11 Threaded; 29mm Cylindrical | 10mm |
| BPB14 | 1/4" | 5/8" - 11 Threaded; 29mm Cylindrical | 10mm |
| BPB516 | 5/16" | 5/8" - 11 Threaded; 29mm Cylindrical | 10mm |
| BPB38 | 3/8" | 5/8" - 11 Threaded; 29mm Cylindrical | 10mm |
| BPB12 | 1/2" | 5/8" - 11 Threaded; 29mm Cylindrical | 10mm |
| BPB58 | 5/8" | 5/8" - 11 Threaded; 29mm Cylindrical | 10mm |
| BPB1116 | 11/16" | 5/8" - 11 Threaded; 29mm Cylindrical | 10mm |
| BPB34 | 3/4" | 5/8" - 11 Threaded; 29mm Cylindrical | 10mm |
| BPB78 | 7/8" | 5/8" - 11 Threaded; 29mm Cylindrical | 10mm |
| BPB1 | 1" | 5/8" - 11 Threaded; 29mm Cylindrical | 10mm |
| BPB118 | 1-1/8" | 5/8" - 11 Threaded; 29mm Cylindrical | 10mm |
| BPB114 | 1-1/4" | 5/8" - 11 Threaded; 29mm Cylindrical | 10mm |
| BPB138 | 1-3/8" | 5/8" - 11 Threaded; 29mm Cylindrical | 10mm |
| BPB112 | 1-1/2" | 5/8" - 11 Threaded; 29mm Cylindrical | 10mm |
| BPB134 | 1-3/4" | 5/8" - 11 Threaded; 29mm Cylindrical | 10mm |
| BPB2 | 2" | 5/8" - 11 Threaded; 29mm Cylindrical | 10mm |
| BPB238 | 2-3/8" | 5/8" - 11 Threaded; 29mm Cylindrical | 10mm |
| BPB258 | 2-5/8" | 5/8" - 11 Threaded; 29mm Cylindrical | 10mm |

BEAST PRO SERIES HARD PORCELAIN BLADE

The BEAST PRO Series Hard Porcelain tile blades are designed to cut porcelain, marble, granite and ceramic tiles. The thin kerf cutting edge allows for a clean, fast cut with virtually no chipping. The Beast porcelain tile blades are engineered with a reinforced silent core hub which ensures straight cuts and greatly reduces noise.

- CONFIGURATION:** SEGMENTED
APPLICATION: PORCELAIN TILE
 CERAMIC TILE
 MARBLE
 GRANITE

- FAST, CLEAN CUT
- LONG LIFE
- 4" - 5" USE WET OR DRY
- 7" & 10" WET ONLY



| ITEM | DIAMETER | KERF | ARBOR | SEG/RIM HEIGHT |
|-------|----------|------|--------------------|----------------|
| BP4 | 4" | .050 | 7/8" - 20mm - 5/8" | 7mm |
| BP4.5 | 4-1/2" | .050 | 7/8" - 20mm - 5/8" | 7mm |
| BP5 | 5" | .050 | 7/8" - 20mm - 5/8" | 7mm |
| BP7 | 7" | .055 | 5/8" | 7mm |
| BP10 | 10" | .055 | 5/8" | 10mm |

BEAST PRO SERIES PORCELAIN STANDARD CORE BLADE

The BEAST PRO Series Porcelain Standard Core tile blade is designed to cut porcelain, ceramic, marble and granite tiles. It provides the same chip free cutting ability as our popular Reinforced Hub series but with a standard core. The standard core design allows contractors to lift tiles to square notches or finish corners. The thin kerf core cuts cleanly through dense porcelains but has enough rigidity to prevent blade deflection or curved cuts.

- CONFIGURATION:** CONTINUOUS RIM
APPLICATION: PORCELAIN TILE
 CERAMIC TILE
 MARBLE
 GRANITE

- IDEAL FOR CUTTING HARD DENSE PORCELAINS
- FAST, CLEAN CUT
- LONG LIFE
- USE WET



| ITEM | DIAMETER | KERF | ARBOR | SEG/RIM HEIGHT |
|-------|----------|------|-------|----------------|
| BPS7 | 7" | .050 | 5/8" | 7mm |
| BPS10 | 10" | .050 | 5/8" | 10mm |

BEAST PRO SERIES GLASS TILE BLADE

The BEAST PRO Series Glass Tile blade has been thoroughly tested and proven to cut any thickness of glass, including dual thickness laminated glass, chip free. It is engineered with a special ultra-fine-grit diamond bond matrix which allows it to cut glass cleanly and chip free.

- CONFIGURATION:** CONTINUOUS RIM
APPLICATION: GLASS TILE
 PORCELAIN TILE
 CERAMIC TILE

- SUPER CLEAN, CHIP-FREE CUT
- LONG LIFE
- USE WET



| ITEM | DIAMETER | KERF | ARBOR | SEG/RIM HEIGHT |
|------|----------|------|--------------------|----------------|
| BG4 | 4" | .050 | 7/8" - 20mm - 5/8" | 7.5mm |
| BG7 | 7" | .050 | 5/8" | 8mm |
| BG10 | 10" | .050 | 5/8" | 8mm |

The BEAST PRO Series Porcelain Turbo Mesh blade is designed with a unique rim which greatly aids in cooling the blade, resulting in longer blade life and extremely clean and fast cutting. This series is appropriate for use in today's hardest porcelain tiles and will also perform extremely well in softer ceramic or natural stone tiles.

CONFIGURATION: MESH TURBO
APPLICATION: PORCELAIN TILE
CERAMIC TILE

- MESH STYLE RIM COOLS BLADE QUICKLY
- FAST, CLEAN CUT
- LONG LIFE
- 4" - 5" USE WET OR DRY
- 7" & 10" WET ONLY



| ITEM | DIAMETER | KERF | ARBOR | SEG/RIM HEIGHT |
|--------|----------|------|--------------------|----------------|
| BPM4 | 4" | .047 | 7/8" - 20mm - 5/8" | 10mm |
| BPM4.5 | 4-1/2" | .047 | 7/8" - 20mm - 5/8" | 10mm |
| BPM5 | 5" | .047 | 7/8" - 20mm - 5/8" | 10mm |
| BPM7 | 7" | .062 | 7/8" - DM - 5/8" | 10mm |
| BPM10 | 10" | .062 | 5/8" | 10mm |

BEAST PRO SERIES PORCELAIN TURBO BLADE

The BEAST PRO Series Porcelain Turbo blades are ideal for fast cutting applications on porcelain, marble, granite, and other hard tiles. It is engineered with a thin, narrow-slot turbo rim, which cuts extremely fast while reducing chipping. The BEAST Porcelain Turbo Blades are engineered with a reinforced silent core hub which ensures straight cuts and greatly reduces noise.

CONFIGURATION: TURBO, REINFORCED HUB
APPLICATION: PORCELAIN TILE
CERAMIC TILE

- EXTREMELY FAST CUTTING
- 4" - 5" USE WET OR DRY
- 7" & 10" WET ONLY




| ITEM | DIAMETER | KERF | ARBOR | SEG/RIM HEIGHT |
|--------|----------|------|--------------------|----------------|
| BPT4 | 4" | .050 | 7/8" - 20mm - 5/8" | 10mm |
| BPT4.5 | 4-1/2" | .050 | 7/8" - 20mm - 5/8" | 10mm |
| BPT5 | 5" | .050 | 7/8" - 20mm - 5/8" | 10mm |
| BPT7 | 7" | .063 | 7/8" - DM - 5/8" | 10mm |
| BPT10 | 10" | .070 | 5/8" | 10mm |

PRM SERIES CONCAVE STONE BLADE

Concave blades used for cutting curves in stone surfaces.

CONFIGURATION: TURBO, CONCAVE
DIAMOND RATING:
WELD TYPE: SINTERED
APPLICATION: STONE
GRANITE
MARBLE

- VERY FAST AND AGGRESSIVE CUTTING
- LONG LIFE
- USE WET OR DRY




| ITEM | DIAMETER | KERF | ARBOR | SEG/RIM HEIGHT |
|--------------|----------|------|--------------------|----------------|
| TB4CONCAVE | 4" | .085 | 7/8" - 20mm - 5/8" | 8mm |
| TB4.5CONCAVE | 4-1/2" | .085 | 7/8" - 20mm - 5/8" | 8mm |
| TB5CONCAVE | 5" | .085 | 7/8" - 20mm - 5/8" | 8mm |
| TB7CONCAVE | 7" | .090 | 7/8" - 20mm - 5/8" | 8mm |

SPP SERIES SINGLE ROW CUP WHEEL

The SPP Series Single Row Cup Wheels are an excellent cost performance value and are designed for grinding concrete, masonry and a variety of other applications. The single row configuration allows for very fast aggressive stock removal.

CONFIGURATION: SINGLE ROW
DIAMOND RATING:
WELD TYPE: HIGH-FREQUENCY WELDED
APPLICATION: CONCRETE
BRICK
BLOCK

- VERY FAST AND AGGRESSIVE GRINDING
- USE WET OR DRY



| ITEM | DIAMETER | ARBOR |
|------------|----------|------------------|
| SPPGC4SN | 4" | 5/8" - 11 Thread |
| SPPGC4.5SN | 4-1/2" | 5/8" - 11 Thread |
| SPPGC5SN | 5" | 5/8" - 11 Thread |
| SPPGC7SN | 7" | 5/8" - 11 Thread |

SPP SERIES DOUBLE ROW CUP WHEEL

The SPP Series Double Row Cup Wheels are an excellent cost performance value and are designed for grinding concrete, masonry and a variety of other applications. The double row configuration provides a smoother finish and more stable platform than traditional single row cup wheels.

CONFIGURATION: DOUBLE ROW
DIAMOND RATING:
WELD TYPE: HIGH-FREQUENCY WELDED
APPLICATION: CONCRETE
BRICK
BLOCK

- VERY FAST AND AGGRESSIVE GRINDING
- COATING REMOVAL
- USE WET OR DRY




| ITEM | DIAMETER | ARBOR |
|------------|----------|------------------|
| SPPGC4DN | 4" | 5/8" - 11 Thread |
| SPPGC4.5DN | 4-1/2" | 5/8" - 11 Thread |
| SPPGC5DN | 5" | 5/8" - 11 Thread |
| SPPGC7DN | 7" | 5/8" - 11 Thread |

SPP SERIES SEGMENTED TURBO CUP WHEEL

SPP Series Segmented Turbo Cup Wheels are an excellent cost performance value. The segments are arranged diagonally around the rim of the cup wheel allowing more diamonds to contact the work surface than with any other style. Because of this configuration, the Segmented Turbo design also provides the most stable grinding platform of any cup wheel, preventing gouging and uneven grinds.

CONFIGURATION: SEGMENTED TURBO
DIAMOND RATING:
WELD TYPE: HIGH-FREQUENCY WELDED
APPLICATION: CONCRETE
BRICK
BLOCK


- VERY FAST AND AGGRESSIVE GRINDING
- COATING REMOVAL
- USE WET OR DRY

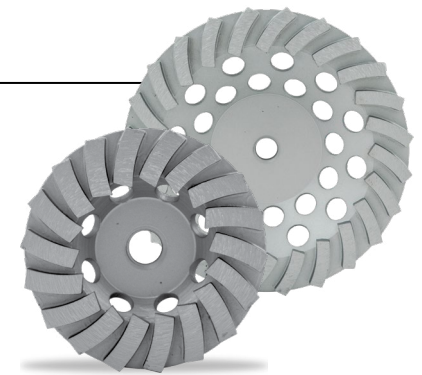

| ITEM | DIAMETER | ARBOR | NUMBER OF SEGMENTS |
|--------------|----------|------------------|--------------------|
| SPPSTC4N9 | 4" | 5/8" - 11 Thread | 9 |
| SPPSTC4.5N9 | 4-1/2" | 5/8" - 11 Thread | 9 |
| SPPSTC7N12 | 7" | 5/8" - 11 Thread | 12 |
| SPPSTC4N18 | 4" | 5/8" - 11 Thread | 18 |
| SPPSTC4.5N18 | 4-1/2" | 5/8" - 11 Thread | 18 |
| SPPSTC5N18 | 5" | 5/8" - 11 Thread | 18 |
| SPPSTC7N24 | 7" | 5/8" - 11 Thread | 24 |

ARROW STYLE CUP WHEEL

Arrow Style cup wheels are designed for floor preparation work prior to the polishing process. It is designed for grinding thick coatings, epoxy, urethane, and other membrane materials. The arrow shaped segment allows for scraping and grinding at the same time. This cup wheel features venting holes to dissipate heat for extended wheel life. These diamond cup wheels provide fast production rates and long life and can be used for wet or dry grinding.



| ITEM | DIAMETER | ARBOR | STYLE |
|--------|----------|------------------|-------|
| STC7AN | 7" | 5/8" - 11 Thread | Arrow |

T-SEG STYLE CUP WHEEL


T-Seg Style cup wheels are used for thin coating removal and surface preparation. The "T" segment design provides each segment with more surface area contact and allows the operator more control with less opportunity to dig into the floor. The T-Seg provides flexibility over a wide range of surfaces without sacrificing tool life.



| ITEM | DIAMETER | ARBOR | STYLE |
|-----------|----------|------------------|-----------|
| SGC5TSEGN | 5" | 5/8" - 11 Thread | T-Segment |
| SGC7TSEGN | 7" | 5/8" - 11 Thread | T-Segment |

PCD STYLE CUP WHEEL


PCD Style cup wheels are ideally suited for the removal of various coatings on materials which cause a clogging of the diamond segments. A polycrystalline diamond (PCD) is a high quality cutting material and is used for the stone, wood, plastic and for non-ferrous machining. The PCD is made of different-sized diamond crystals by a sinter process. Thus, the PCD is extremely hard and wear resistant. It is ideal for removing coatings of all kinds.



| ITEM | DIAMETER | ARBOR | STYLE |
|--------|----------|------------------|-------|
| PCD4DN | 4" | 5/8" - 11 Thread | PCD |
| PCD7DN | 7" | 5/8" - 11 Thread | PCD |

BACK UP PAD

Rubber back up pads for use with velcro backed polishing pads. Available in flexible stiffness, these pads greatly reduce felt vibration while providing the desired level of flex. Utilizes a 5/8" - 11 threaded arbor to attach to surface polishers, hand grinders and other polishing equipment.




| ITEM | DIAMETER |
|----------------------|----------|
| Flexible Back Up Pad | BUP4 |
| Rigid Back Up Pad | BUP4R |

CONTRACTOR SERIES WET POLISHING PAD

Contractor series resin bonded wet polishing pads are designed to polish granite, marble, concrete and other natural stone. They offer a combination of speed, polish and life for an excellent cost-performance value.

APPLICATION: GRANITE
MARBLE
STONE
CONCRETE

- FAST PERFORMANCE AND NICE FINISH
- FLEXIBLE DESIGN
- USE WET

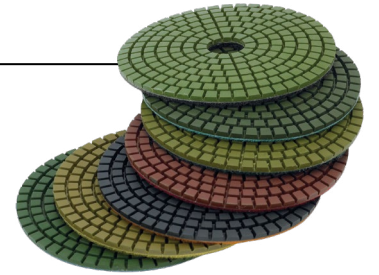


| ITEM | DIAMETER | GRIT |
|----------|----------|------|
| PD504C | 4" | 50 |
| PD1004C | 4" | 100 |
| PD2004C | 4" | 200 |
| PD4004C | 4" | 400 |
| PD8004C | 4" | 800 |
| PD15004C | 4" | 1500 |
| PD30004C | 4" | 3000 |

CONTRACTOR SERIES DRY POLISHING PAD

Dry resin bonded polishing pads are designed to polish granite, marble, concrete and other natural stone. They are engineered with a high quality and concentration of diamond to provide fast and smooth polishing, with a fantastic finish. Specially formulated resin matrix provides exceptional performance and life in dry polishing applications.

APPLICATION: GRANITE
MARBLE
STONE
CONCRETE

- FAST PERFORMANCE AND NICE FINISH
- FLEXIBLE DESIGN
- LONG LIFE
- USE WET OR DRY

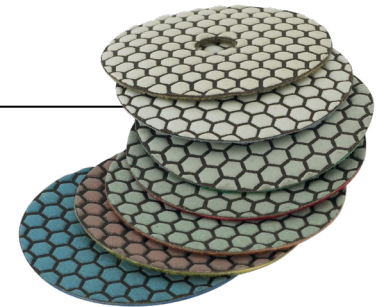


| ITEM | DIAMETER | GRIT |
|-----------|----------|------|
| DPD504C | 4" | 50 |
| DPD1004C | 4" | 100 |
| DPD2004C | 4" | 200 |
| DPD4004C | 4" | 400 |
| DPD8004C | 4" | 800 |
| DPD15004C | 4" | 1500 |
| DPD30004C | 4" | 3000 |

BEAST PRO SERIES SPIKE GRINDING WHEEL

The BEAST PRO Series Spike Grinding Wheel is engineered with unique diamond spikes arranged in clusters on the outer portion of the wheel. It is designed to remove coatings such as thin-set, mastic, epoxy, mesh, and much more from concrete, masonry and stone. The BEAST Spike Grinding wheel is also ideal for grinding and stock removal on concrete, masonry and stone surfaces. It is equipped with a durable steel body and has a 5/8"-11 threaded arbor hole.

CONFIGURATION: DIAMOND SPIKES
APPLICATION: CONCRETE
MASONRY
MARBLE
GRANITE
OTHER STONE

- FAST AND AGGRESSIVE COATING REMOVAL
- VERY LONG LIFE
- DURABLE STEEL BODY WITH 5/8"-11 THREAD
- USE WET OR DRY



| ITEM | DIAMETER | ARBOR |
|----------|----------|------------------|
| 11350066 | 4" | 5/8" - 11 Thread |
| 11350067 | 5" | 5/8" - 11 Thread |
| 11350068 | 7" | 5/8" - 11 Thread |

PRO SERIES V-SHAPED CRACK CHASER

The PRO Series V-Shaped Crack Chaser is designed to be used on concrete and is manufactured with an inverted "V" shaped segment tapering down from the base of the segment. This "V" shaped segment provides a clean cut with uniform edging.

CONFIGURATION: SEGMENTED, V-SHAPED
DIAMOND RATING:
WELD TYPE: LASER
APPLICATION: CURED CONCRETE

- AVAILABLE IN 1/4" AND 3/8" WIDTHS (KERF)
- VERY FAST AND AGGRESSIVE CUTTING
- ULTRA LONG LIFE
- USE WET OR DRY



| ITEM | DIAMETER | KERF | ARBOR | SEG/RIM HEIGHT |
|----------|----------|------|----------------|----------------|
| CKVN4375 | 4" | .375 | 5/8"-11 Thread | 12.7mm |
| CKVN7375 | 7" | .375 | 5/8"-11 Thread | 12.7mm |

PV-PRO SERIES PAVER / BRICK BLADE

The PV-PRO Series paver / brick blade provides a higher return on investment, longer blade life, and better cutting speeds than all other paver blade series on the market. The laser welded segment has excellent strength and outperforms sintered blades in both high speed hand-held and masonry saw cutting applications. The PV-PRO is the BEST paver blade option for masonry contractors guaranteed!

CONFIGURATION: SEGMENTED PAVER
DIAMOND RATING:
APPLICATION: PAVERS
BRICK
STONE
CONCRETE

- VERY FAST AND AGGRESSIVE CUTTING
- EXCEPTIONAL PERFORMANCE
- LONG LIFE
- USE WET OR DRY



| ITEM | DIAMETER | KERF | ARBOR | SEG/RIM HEIGHT |
|--------------|----------|------|------------------|----------------|
| PV10095DMPRO | 10" | .095 | 7/8" - DM - 5/8" | 10mm |

TB SERIES DRY TURBO HOLE SAW

Turbo style hole saws are intended for pass through drilling in ceramic tile, granite, marble and concrete applications. Removable pilot bit acts as centering aid. Bits below 1" diameter do not have pilot bits.

CONFIGURATION: TURBO
DIAMOND RATING:
WELD TYPE: SINTERED
APPLICATION: CERAMIC TILE
GRANITE
MARBLE

- VERY FAST AND AGGRESSIVE DRILLING
- USE WET OR DRY



| ITEM | DIAMETER | ARBOR | SEG/RIM HEIGHT |
|-------|----------|------------|----------------|
| 014TB | 1/4" | 10mm Shaft | 5.5mm |
| 012TB | 1/2" | 10mm Shaft | 5.5mm |
| 058TB | 5/8" | 10mm Shaft | 5.5mm |
| 034TB | 3/4" | 10mm Shaft | 5.5mm |
| 100TB | 1" | 10mm Shaft | 5.5mm |
| 118TB | 1-1/8" | 10mm Shaft | 5.5mm |
| 114TB | 1-1/4" | 10mm Shaft | 5.5mm |
| 138TB | 1-3/8" | 10mm Shaft | 5.5mm |
| 112TB | 1-1/2" | 10mm Shaft | 5.5mm |
| 158TB | 1-5/8" | 10mm Shaft | 5.5mm |
| 134TB | 1-3/4" | 10mm Shaft | 5.5mm |

| ITEM | DIAMETER | ARBOR | SEG/RIM HEIGHT |
|-------|----------|------------|----------------|
| 178TB | 1-7/8" | 10mm Shaft | 5.5mm |
| 200TB | 2" | 10mm Shaft | 5.5mm |
| 214TB | 2-1/4" | 10mm Shaft | 5.5mm |
| 212TB | 2-1/2" | 10mm Shaft | 5.5mm |
| 234TB | 2-3/4" | 10mm Shaft | 5.5mm |
| 300TB | 3" | 10mm Shaft | 5.5mm |
| 314TB | 3-1/4" | 10mm Shaft | 5.5mm |
| 312TB | 3-1/2" | 10mm Shaft | 5.5mm |
| 334TB | 3-3/4" | 10mm Shaft | 5.5mm |
| 400TB | 4" | 10mm Shaft | 5.5mm |
| 412TB | 4-1/2" | 10mm Shaft | 5.5mm |
| 500TB | 5" | 10mm Shaft | 5.5mm |

GLASS & TILE CYLINDRICAL DRILL BIT

APPLICATION: NON-TEMPERED GLASS, CERAMIC, PLASTIC, COMPOSITE, BRICK AND HOLLOW BRICK, MARBLE

FEATURES


- New harder carbide grade - Made in Europe
- 4 sided design "diamond style" with aggressive cutting edges (special Diager sharpening)
- Copper past brazing
- Fast spiral with tightened pitch
- Total length improved

BENEFITS

- Aggressive tip improves precision and penetration.
- Drilling through up to class 3 ceramic tiles
- Use dry for easy work
- Better resistance to high temperature when drilling
- Speed up dust extraction
- Ideal for deep materials
- Whirlwind effect : help to cool down the drill bit



| ITEM | DIAMETER | OVERALL | USABLE |
|---------------|-------------|---------|-----------------|
| I400UD1/8L03 | 1/8" | 3" | 1-1/2" |
| I400UD5/32L03 | 5/32" | 3" | 1-1/2" |
| I400UD3/16L03 | 3/16" | 3" | 1-1/2" |
| I400UD1/4L04 | 1/4" | 4" | 2-1/2" |
| I400UD5/16L04 | 5/16" | 4" | 2-1/2" |
| I400UD3/8L04 | 3/8" | 4" | 2-1/2" |
| I400UD1/2L04 | 1/2" | 4" | 2-1/2" |
| I404U4 | 1/8" - 1/2" | 3" & 4" | 1-1/2" - 2-1/2" |

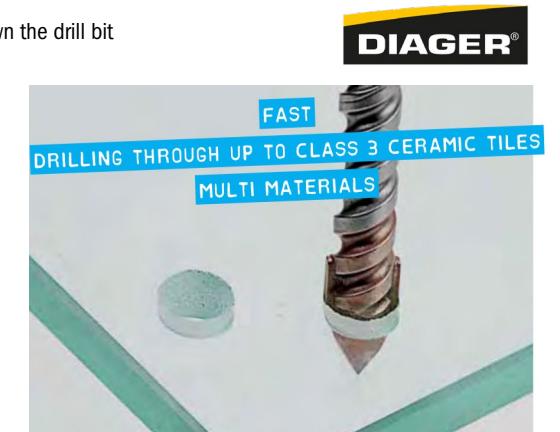

ARMALY PROPLUS POLYESTER SPONGE

Armaly ProPlus® Heavy Duty Grouting & Concrete Sponge Vac-U-Pac™ - Contains 8 - 30 ct. bulk vacuum packed bags of the 00603 size sponge for better inventory control. Armaly ProPlus Grouting & Concrete Sponges are made with our HDQ Polyester sponge material. This time tested formula provides superior strength and a cell structure that wipes and rinses excess grout & concrete faster. The sponge is shaped with rounded edges that are designed to minimize digging out or scoring of grout lines to meet the demands of the professional setter.



Armaly ProPlus® Epoxy Grouting Pre-Wipe Sponge - The Armaly ProPlus Epoxy Grouting sponge has a cell structure that is designed to quickly pick-up excess epoxy grout prior to final wipe with the Armaly ProPlus Grouting & Concrete Sponge.



Armaly ProPlus® Grouting & Haze Buffer Sponges are made with our HDQ Polyester sponge material. This time tested formula provides superior strength and a cell structure that wipes and rinses excess grout faster. This product incorporates a layer of our 2520 BuffCell™ material on one side to assist in removing grout haze and dried grout from the surface of the tiled area prior to cure. The sponge is shaped with rounded edges that are designed to minimize digging out or scoring of grout lines...to meet the demands of the professional setter.

ITEM

DESCRIPTION

| | |
|-------|--|
| 45603 | Armaly ProPlus® Heavy Duty Grouting & Concrete Sponge Vac-U-Pac™ - 240 ct |
| 00605 | Armaly ProPlus® Epoxy Grouting Pre-Wipe Sponge - 12 ct |
| 45606 | Armaly ProPlus® Heavy Duty Grouting & Haze Buffer Sponge Vac-U-Pac™ - 240 ct |

LACKMOND®

YOUR TRUSTED PARTNER FOR ALL YOUR
CUTTING, GRINDING, POLISHING AND DRILLING NEEDS

Lackmond LLC
1831 West Oak Pkwy
Suite A
Marietta, GA 30062
Toll Free 800-850-2044

Lackmond.com

BEAST
BY LACKMOND®